
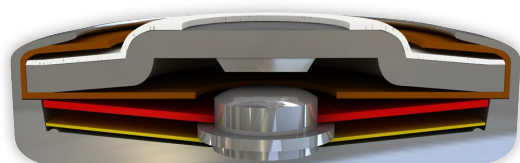
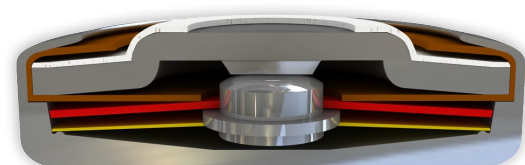


# DATASHEET

## Thermal Protector C01

### Type series 01

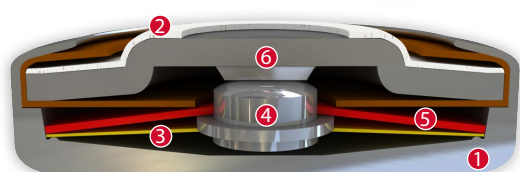

### Construction and function

The switchgear of type series 01 is fixed in a positive lock and is self-aligning between the floor of a conductive housing (1) and a contact cap which is made of steel (2) and insulated from it, plus an integrated stationary silver contact (6) which closes the housing like a button cell. At the same time, the spring snap-in disc (3) which forms the current transfer element bears the movable contact (4) and discharges the flow of current and self-heating from the bimetallic disc (5) by exercising consistent, steady contact pressure. The bimetallic disc (5) is held on the one movable contact (4) which sticks out through this without having to be welded or fixed. As such, it can continually work (exposed) and only reacts to the ambient temperature in the device to be protected. When the rated switching temperature is reached, the bimetallic disc (5) snaps into its inverted position and pushes the spring snap-in disc (3) downwards. The contact is abruptly opened and the temperature rise of the device to be protected is disrupted. If the ambient temperature now falls, the bimetallic disc (5) snaps back into its start position when reaching the defined reset temperature and the contact is closed again.



### Features:

|                                 |                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specially flat design           | to fit closely built-up circuits                                                                                                                                                                    |
| Quick response sensitivity      | Featured by small protector mass and the metal-housing                                                                                                                                              |
| Excellent long term performance | due to instantaneous switching, fine silver contacts, constant contact resistance and to electrically as well as mechanically unstressed bimetallic disc, reproducible switching temperature values |
| Instantaneous switching         | with always constant contact pressure up to the nominal switching point, resulting in low contact stress                                                                                            |
| Very short bounce times         | < 1 ms                                                                                                                                                                                              |
| Temperature resistance          | by use of high temperature resistant materials and components                                                                                                                                       |



## C01

Type: Normally closed; resets automatically; with connector cables; with or without epoxy; without insulation



Diameter d 9,0 mm  
Installation height h ab 3,9 mm

|                                                                                |                                                                                                                        |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Nominal switching temperature (NST) in 5 °C increments                         | 60 °C - 200 °C                                                                                                         |
| Tolerance (standard)                                                           | ±2,5 K / ±5 K                                                                                                          |
| Reverse Switch Temperature (defined RST is possible at the customer's request) | UL ≥ 35° C (≤ 80° C NST)<br>-35 K ± 15 K (≥ 85° C ≤ 180° C NST)<br>VDE -65 K ± 15 K (≥ 185° C ≤ 200° C NST)<br>≥ 35 °C |
| Installation height                                                            | from 3,9 mm                                                                                                            |
| Diameter                                                                       | 9,0 mm                                                                                                                 |
| Resistance to impregnation *                                                   | suitable                                                                                                               |
| Suitable for installation in protection class                                  | I                                                                                                                      |
| Pressure resistance to the switch housing *                                    | 450 N                                                                                                                  |
| Standard connection                                                            | Lead wire 0,25 mm <sup>2</sup> / AWG22                                                                                 |
| Available approvals (please state)                                             | IEC; ENEC; VDE; UL; CSA; CQC; CMJ                                                                                      |
| Operational voltage range AC/DC                                                | up until 500 V AC / 14 V DC                                                                                            |
| Rated voltage AC                                                               | 250 V (VDE) 277 V (UL)                                                                                                 |
| Rated current AC cos φ = 1.0/cycles                                            | 2,5 A / 10.000                                                                                                         |
| Rated current AC cos φ = 0.6/cycles                                            | 1,6 A / 10.000                                                                                                         |
| Max. switching current AC cos φ = 1.0/cycles                                   | 6,3 A / 3.000<br>7,5 A / 300                                                                                           |
| Rated current AC cos φ = 0.4/cycles                                            | 1,8 A / 10.000                                                                                                         |
| Max. switching current AC cos φ = 0.4/cycles                                   | 7,2 A / 1.000                                                                                                          |
| Rated voltage DC                                                               | 12 V (VDE, UL)                                                                                                         |
| Max. switching current DC/cycles                                               | 40,0 A / 5.000                                                                                                         |
| Total bounce time                                                              | < 1 ms                                                                                                                 |
| Contact resistance (according to MIL-STD. R5757)                               | ≤ 50 mΩ                                                                                                                |
| Vibration resistance at 10 ... 60 Hz                                           | 100 m/s <sup>2</sup>                                                                                                   |

### Ordering example:

C01 - 125. 05 0100 / 0100  
Type / version \_\_\_\_\_  
NST [ °C ] \_\_\_\_\_  
Tolerance [ K ] \_\_\_\_\_  
Lead lengths [ mm ] \_\_\_\_\_ L<sub>1</sub> L<sub>2</sub>

### Marking example:

 **thermik**  
Trade mark \_\_\_\_\_  
Type / version **01**  
NST [ °C ] . Tolerance [ K ] — **125.05**

### More varieties of the type series 01:

- 01 – without cables; without insulation; for clip contact; minimum batch sizes
- L01 – with connector cables; with epoxy; fully insulated in a screw on housing
- F01 – with connector cables; with epoxy; fully insulated in a Nomex® cap
- N01 – with a connection wire; partially insulated in a plastic cap
- C01 – with connector cables; with or without epoxy; without insulation
- S01 – with connector cables; with or without epoxy; with insulation
- C01 Pin – with pins; with epoxy; without insulation
- B01 – with connector cables; with epoxy; fully insulated in a Ryton® cap
- S01HT – high temperature model; with connector cables; insulation: PTFE
- C01HT – high temperature model; without insulation

[www.thermik.de/data/01](http://www.thermik.de/data/01)  
[www.thermik.de/data/L01](http://www.thermik.de/data/L01)  
[www.thermik.de/data/F01](http://www.thermik.de/data/F01)  
[www.thermik.de/data/N01](http://www.thermik.de/data/N01)  
[www.thermik.de/data/C01](http://www.thermik.de/data/C01)  
[www.thermik.de/data/S01](http://www.thermik.de/data/S01)  
[www.thermik.de/data/C01-Pin](http://www.thermik.de/data/C01-Pin)  
[www.thermik.de/data/B01](http://www.thermik.de/data/B01)  
[www.thermik.de/data/S01HT](http://www.thermik.de/data/S01HT)  
[www.thermik.de/data/C01HT](http://www.thermik.de/data/C01HT)

\*In accordance with the Thermik test - Specifications relating to part applications (on the part of the buyer) which deviate from our standards are not checked for their capacity to support an application and/or conformity with standards. The responsibility for testing the suitability of Thermik products for such applications falls upon the user. \*Slight deviations are possible in terms of dimensions / values, depending on the embodiment of the product. - We reserve the right to make technical changes in the course of further development. - Data is concerning certain data, measurement methods, applications, approvals, etc. can be supplied upon request.